


Zemná skrutka typ U

Konštrukčná oceľ S235, tr. 4.6, R_e 235 MPa, žiarový zinok EN ISO 1461

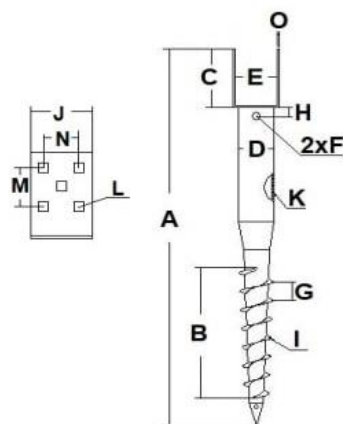

KÓD	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	K mm	L mm	M mm	N mm	O mm	WLL kg	Kg/1 ks
Štandardná dĺžka																	
060	585	275	135	68	60	18	35	25	2	70	2	11x11	50	42	3,8	300	1,90
070	685	275	135	68	70	18	35	25	2	70	2	11x11	80	42	3,8	400	2,20
080	685	275	135	68	80	18	35	25	2	70	2	11x11	80	42	3,8	400	2,25
090	685	275	135	68	90	18	35	25	2	70	2	11x11	80	42	3,8	600	2,30
100	885	275	135	68	100	18	35	25	2	70	2	11x11	80	42	3,8	600	2,90
120	885	275	135	68	120	18	35	25	2	70	2	11x11	80	42	3,8	600	3,00
140	885	275	135	68	140	18	35	25	2	70	2	11x11	80	42	3,8	600	3,10
Predĺžená dĺžka																	
081	885	275	135	68	80	18	35	25	2	70	2	11x11	80	42	3,8	600	2,80
101	1085	275	135	68	100	18	35	25	2	70	2	11x11	80	42	3,8	800	3,45
102	1285	425	135	68	100	18	35	25	2	70	2	11x11	80	42	3,8	800	4,20
121	1085	275	135	68	120	18	35	25	2	70	2	11x11	80	42	3,8	800	3,55
141	1085	275	135	68	140	18	35	25	2	70	2	11x11	80	42	3,8	800	3,65

- 10 otvorov slúžiacich k ukotveniu rámu
- F= montážny otvor
- K = hrúbka steny skrutky
- M+N = rozteč
- O = sila navarenej pätky
- WLL= nosnosť pri zvislom rovnomernom zaťažení
- Tolerancia uvedených rozmerov a hmotností je 5%